

PINTEK AC/DC Current Probe

★ High Sensitivity!

★ Low Noise!

PA-622

- Max. $\pm 100A$ DCA
- Sensitivity: $\geq 10mA$
- Bandwidth: DC~300KHz
- Rise Time: 1.2 μ S
- Over Range Function
- 10mV/A, 100mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable




PA-655

- Max. $\pm 50A$ DCA
- Sensitivity: $\geq 5mA$
- Bandwidth: DC~500KHz
- Rise Time: 0.7 μ S
- Over Range Function
- 20mV/A, 200mV/A Range
- Adaptor/Battery Input
- Separating Design, Convenient Durable



Pintek Electronics Co., Ltd
www.pintek.com.tw

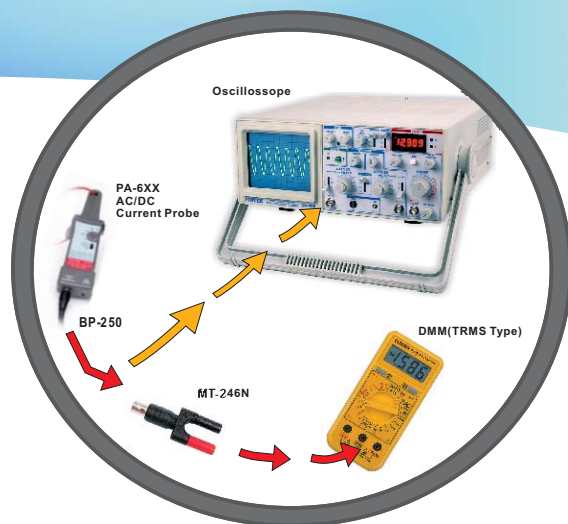

PA-655/PA-622 AC/DC Current Probe



SPECIFICATIONS:

FUNCTION/MODEL	PA-622	PA-655
DC Accuracy Typical	±3%: 50mA~10A peak at 100mV/A ±4%: 500mA~40A peak at 10mV/A ±15%: 40A~100A peak	±3%: 30mA~5A peak at 200mV/A ±4%: 300mA~20A peak at 20mV/A ±15%: 20A~50A peak
Max. Working Voltage	300V CAT III	300V CAT III
Max. Sensitivity	≥ 10 mA	≥ 5 mA
Frequency Range	DC-300KHz(-3dB)	DC-500KHz(-3dB)
Rise Time	1.2 μS	0.7 μS
Battery or Adaptor	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor	
Accessories	BP-250, MT-246N, Adaptor, Instruction Manual.	

ACCESSORIES:



PINTEK

Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan
 Tel: 886-2-86859562~3 ; 886-2-86861898
 Fax: 886-2-86852081 ; 886-2-86861114
<http://www.pintek.com.tw>
 E-Mail : pintek@pintek.com.tw ; pintek@ms26.hinet.net

CE

SALES AGENT

RX
 RUI XIN Instruments Co., Ltd

瑞新儀器有限公司
 43548 台中市梧棲區建國北街217
 巷67號
 電話：04-2657-0601
 傳真：04-2657-0621