





# PA-699 AC/DC Current Probe



## SPECIFICATIONS:

FUNCTION/MODEL	PA-699
Accuracy Typical	±3%: 10mA~8A peak at 1V/A ±4%: 100mA~80A peak at 0.1V/A
Max. Working Voltage	300V CAT III
Max. Sensitivity	≥ 1 mA
Frequency Range	DC-1.5MHz(-3dB)
Rise Time	0.23 μS
Battery or Adaptor	9V NEDA 1604A, IEC DLR61 or PINTEK Specified Adaptor
Accessories	BP-250, MT-246N, Adaptor, Instruction Manual.

## Waveform Comparison Between PA-699 And Other Brand In Market:

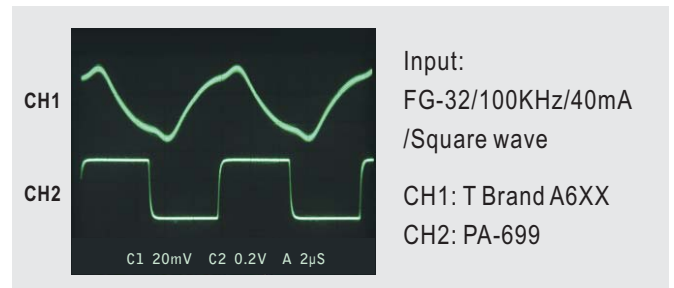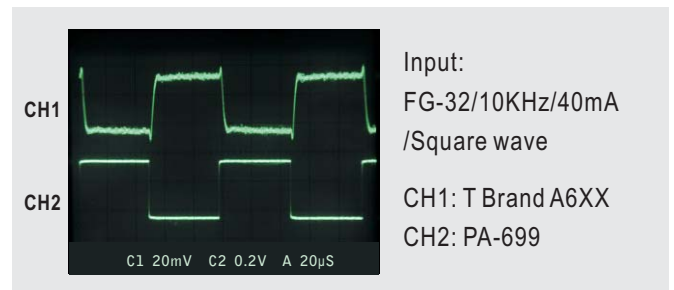

## ACCESSORIES:



# PINTEK

## Pintek Electronics Co., Ltd

2F No.32 Tai-Pen Rd., Shulin Dist., New Taipei City, Taiwan  
Tel: 886-2-86859562~3 ; 886-2-86861898  
Fax: 886-2-86852081 ; 886-2-86861114  
<http://www.pintek.com.tw>  
E-Mail : [pintek@pintek.com.tw](mailto:pintek@pintek.com.tw) ; [pintek@ms26.hinet.net](mailto:pintek@ms26.hinet.net)



SALES AGENT

**RX**  
RUI XIN Instruments Co., Ltd

瑞新儀器有限公司  
43548 台中市梧棲區建國北街217巷67號  
電話：04-2657-0601  
傳真：04-2657-0621